



1. Choose the best location on vehicle to place the mount. Do not place mount in or near an air bag deployment zone or where it will obstruct view of the road.

3. Slide T-tab(s) into the T-slot(s) located on the back of the device or device holder. (Sold separately)




5. Loosen the base cap by turning it counter clockwise and slide the slotted metal shaft of the pedestal onto the base. Turn base cap clockwise to tighten pedestal onto base.



2. Clean off dash surface with alcohol cleaning pad and let dry. Do not attempt application of the dash mount if the temperature

and affix adhesive to the dash. Let stand (at room temperature) for 24 hours before using.




Removal of Dash Mount


is below 68° F (20°C).

To remove the dash mount completely, use a cotton swab dipped in isopropyl alcohol. Simply peel up a corner of the dash mount adhesive and swab under the pad while gently pulling until the adhesive begins to release. Remove slowly. No damage will occur from the adhesive if it has been properly installed and removed per these instructions. You may see a slight discoloration between this area and other parts of your dash due to fading caused by the sun.

6. Bend pedestal to desired angle.



or vertically.

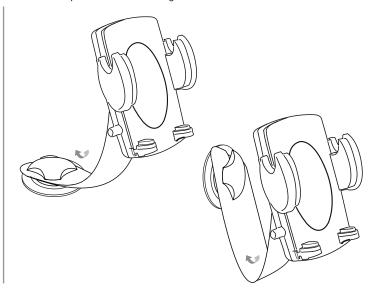



RESOURCES INC. The Mobile Mounting SpecialistsÙ

Consumer Hotline: (USA) (800) 841-0884 (INTÌL) (626) 254-9005 Mon-Fri. 9am-5pm, PST

www.arkon.com Arcadia, CA 91006 USA Made in Taiwan © Copyright 2007 Arkon Resources, Inc.

WARNING:

Do not install Arkon products over an airbag cover or within the airbag deployment zone. Arkon Resources, Inc. assumes no responsibility of liability for injury or death as a result of car crashes and/or airbag deployment.

Arkon Resources, Inc. is not responsible for any damages caused to your car, your device, or yourself due to the installation or use of the pedestal mount.